

BPV



Differential pressure relief valves

Proportional relief valve

BPV

Used in heating and cooling systems, the BPV proportional relief valve works quietly to ensure a minimum flow level in the pump while maintaining the desired supply temperature when operating at low loads.

Key features

- > **Adjustable set-point**
For accurate differential pressure control.
- > **Shut-off function**
For easy maintenance.
- > **AMETAL®**
Dezincification resistant alloy that guarantees a longer valve lifetime, and lowers the risk of leakage.



Technical description

Applications:

Heating and cooling systems
Tapwater systems

Function:

Proportional relief
Adjustable differential pressure (Δp)
Shut-off

Dimensions:

DN 15-32

Pressure class:

PN 20

Setting range:

10-60 kPa

Temperature:

Max working temperature: 120°C
Min working temperature: -20°C

Materials:

Valve body: AMETAL®
Bonnet: AMETAL®
Cone: PTFE coated AMETAL®
Stem: AMETAL®
Union nuts: Brass
Sleeve: Brass
Cap: Brass
Gaskets: Fiber-based aramid
Springs: Stainless steel
O-rings: EPDM rubber
Guide ring: PTFE

AMETAL® is the dezincification resistant alloy of IMI Hydronic Engineering.

Marking:


Valve type, DN, inch size and flow direction arrow.

Connection:

Female thread according to ISO 228, thread length according to ISO 7-1.

Installation

Application example

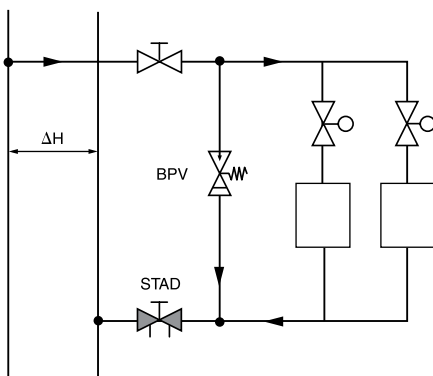


In installations with radiator valves, in which many of the radiator valves have closed, a big part of the pump head will affect the valves since the pressure drop in pipes and accessories has decreased. If the available differential pressure is higher than 30 kPa, noise may occur.

Install the BPV in the circuit after the balancing valve and between the supply and return pipe. The BPV is adjustable and opens at the preset differential pressure, making it possible to maintain desired pressure and flow in the distribution system. By that, the temperature in the pipes is also maintained and the pump is ensured a minimum flow.

Setting





Use a 3 mm Allen key to adjust the BPV valve to operate at the required differential pressure.



Diagram


Valve characteristics

Adjust the BPV valve to the required differential pressure (10-60 kPa). The valve characteristics will be as shown in the diagrams below.

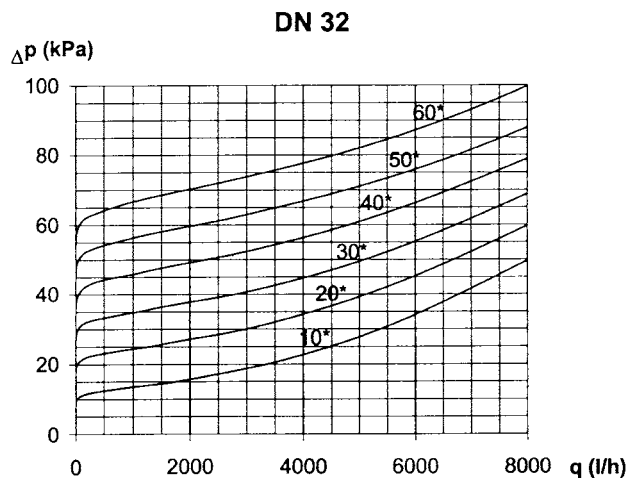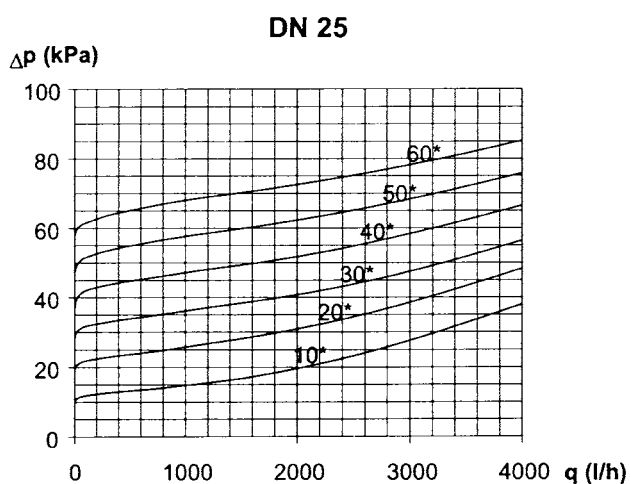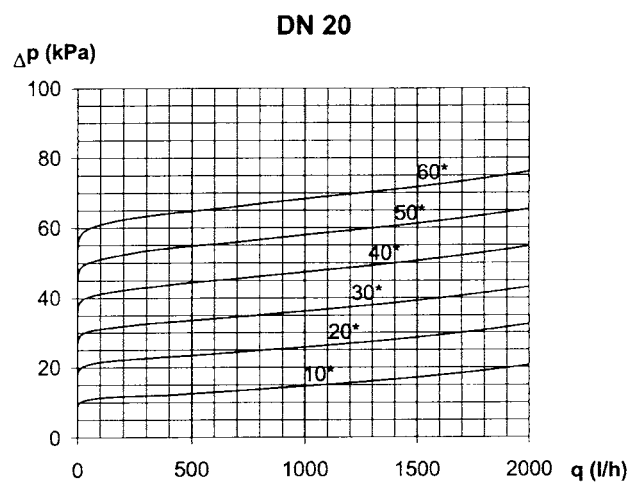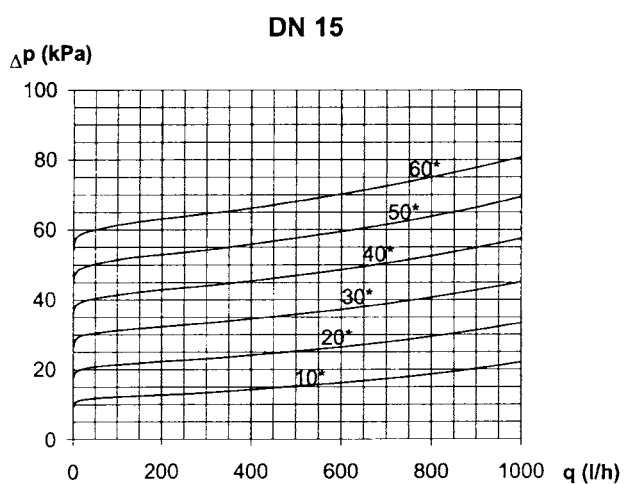


*) Differential pressure setting.

Articles

**Straight**

10-60 kPa

| DN | D | L | H | EAN | Article No |
|----|--------|-----|-----|---------------|------------|
| 15 | G1/2 | 70 | 93 | 7318792851605 | 52 198-315 |
| 20 | G3/4 | 85 | 93 | 7318792851704 | 52 198-320 |
| 25 | G1 | 98 | 103 | 7318792851803 | 52 198-325 |
| 32 | G1 1/4 | 112 | 105 | 7318792851902 | 52 198-332 |

**Angle**

10-60 kPa

| DN | d | D | Da | L | H | H1 | EAN | Article No |
|----|------|------|---------|----|-----|----|---------------|------------|
| 20 | R3/4 | G3/4 | M34x1,5 | 70 | 122 | 33 | 7318792851308 | 52 198-020 |
| 25 | R1 | G1 | M40x2,0 | 83 | 138 | 41 | 7318792851407 | 52 198-025 |

BPV DN 15 and DN 20 can be connected to smooth pipes with KOMBI compression couplings. See catalogue leaflet KOMBI.