




Discharge Devices & Nozzles | Foam Sprinkler / Nozzle | NP & NU Low Expansion Foam Nozzles






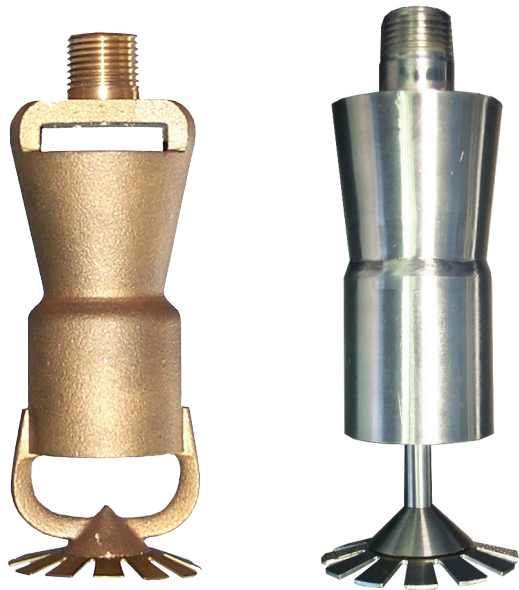


SPECIFICATIONS

Related Documents	None available
Approvals	
Material	Bronze or stainless steel
Connection	1/2" BSP
Options	<ul style="list-style-type: none"> Flange connections ANSI/ASA Different flow rates

Part number	Type	K-factor	Foam expansion ratio	Material	Weight (kg)
ENU15B	Upright	41.2	1:6 ^{1,2}	Bronze	0.5
ENP15B	Pendent			Bronze	0.5
ENP15S	Pendent			Stainless steel	0.5

¹ Foam production using fresh air, or as otherwise indicated by the manufacturer
² Depending on the foam concentrate used. For actual expansion performance data, tests with device and selected foam concentrate should be conducted.

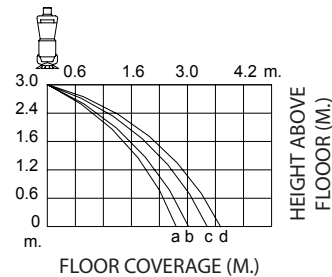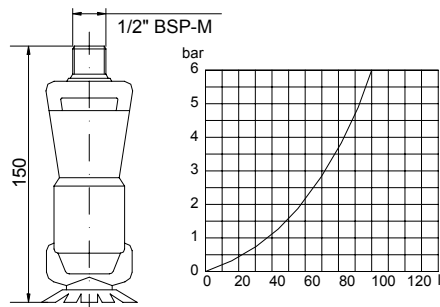

a = 2 bar
 b = 3 bar
 c = 4.5 bar
 d = 6 bar

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved

Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Niederborn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

