




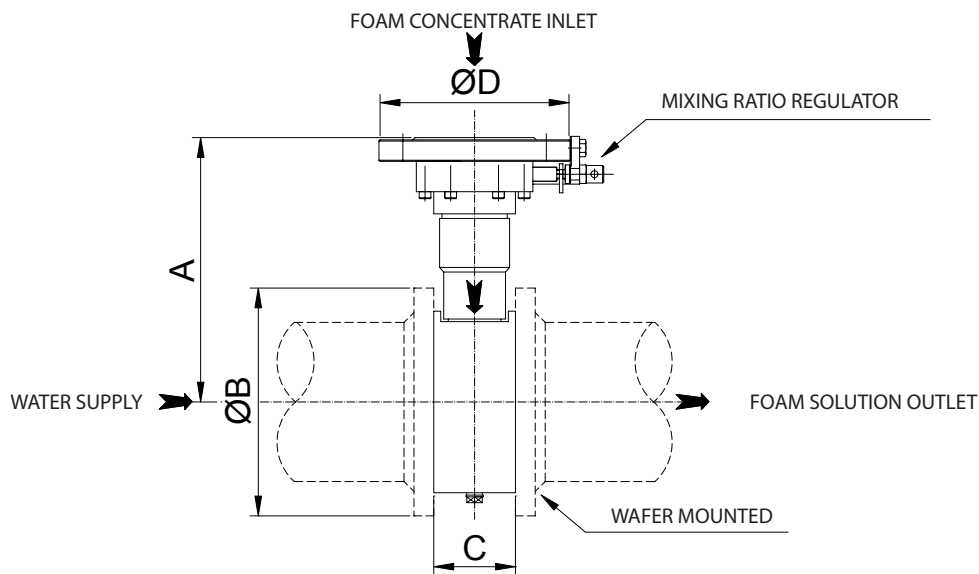


Proportioning Devices | Wide Range Proportioner | WR Wide Range Proportioner



SPECIFICATIONS	
Related documents	None available
Approvals	  
Material	Bronze
Connection type	Wafer
Max. working pressure	16 bar
Weight	See table
Options	Preassembled to bladder tank

For mixing performance accuracy, it is recommended to install the WR within a straight pipe section 7 diameters long upstream and 5 diameters long downstream.



Part number	Dimensions				Flow rate Q		Foam type	Pressure drop @ maxQ Bar ²	Weight (kg)
	A (mm)	ØB	C (mm)	ØD (inch/DN)	min. l/min	max. ¹ l/min			
Model WR standard version - Loose									
EWR04A	209	4" / DN100	70	2" / DN50	75	2,500	Various. Please contact us to verify	1.9	14.0
EWR06A	241	6" / DN150	70	2" / DN50	100	5,600		2.3	22.0
EWR08A	291	8" / DN200	82	3" / DN80	125	10,600		2.7	38.0
EWR10A	323	10" / DN250	82	3" / DN80	150	16,100		2.8	46.0

¹ The WR can work at higher flowrates with larger pressure drop
² The pressure drop at the minimum flowrate is approximately 0.3 bar

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved

Trusted above all.


Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Niederborn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com






Proportioning Devices | Wide Range Proportioner | WR Wide Range Proportioner


WR 100/50 PRESSURE DROP CHART

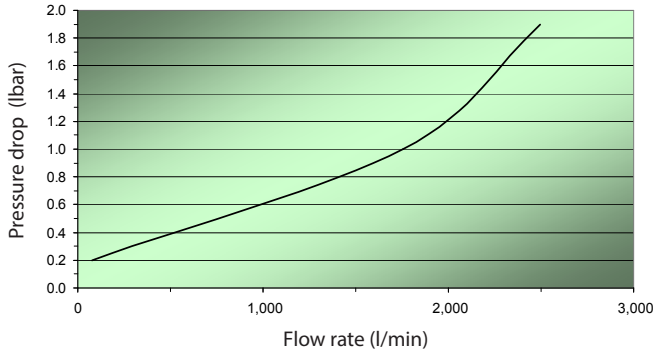


WR 150/50 PRESSURE DROP CHART

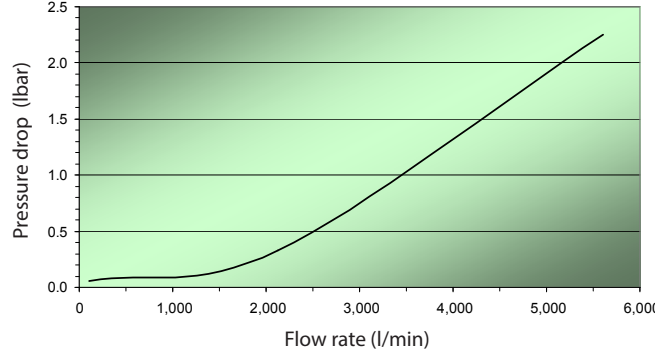

WR 200/80 PRESSURE DROP CHART

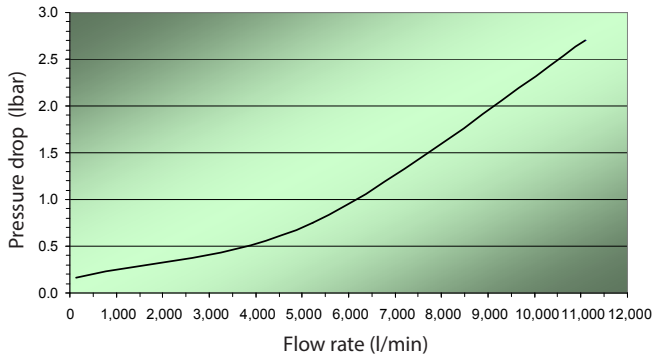

WR 250/80 PRESSURE DROP CHART

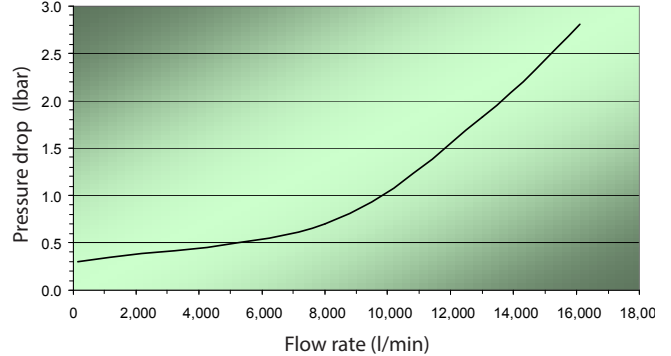

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved

Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Nieder Korn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

