



## Foam Storage Tanks | Foam Bladder Tank | FT Twin Vertical Bladder Tank - PED Compliant



Shown with pre-installed proportioner (available as an option)

SPECIFICATIONS	
Related Documents	None available
Approvals	
Design Pressure	12.1 bar (175 psi)*
Volume	1,000 -15,000 litres
Material (Tank)	Steel with corrosion resistant epoxy/ polyurethane finish
Material (Bladder)	Bladder in nylon-reinforced hypalon neoprene polymers
Weight	See table

\* Others available on request  
Note: Please contact us for further information and proportioning options

Volume (l)	3" Mixer			4" Mixer			6" Mixer			8" Mixer			C (mm)	ØD (mm)	E (mm)	H (mm)	Weight (kg)
	ØD (mm)	A (mm)	B (mm)	ØD (mm)	A (mm)	B (mm)	ØD (mm)	A (mm)	B (mm)	ØD (mm)	A (mm)	B (mm)					
1,000	3" DN80	1,510	735	4" DN100	1,535	745	6" DN150	1,590	775	8" DN200	1,635	795	765	1,000	2,100	2,305	930
1,500		1,510	735		1,535	745		1,590	775		1,635	795	765	1,000	2,100	2,985	1,100
2,000		1,610	785		1,635	795		1,690	825		1,735	845	835	1,100	2,300	3,245	1,350
2,500		1,710	835		1,735	845		1,790	875		1,835	895	920	1,200	2,500	3,375	1,600
3,000		1,810	885		1,835	895		1,890	925		1,935	945	995	1,300	2,700	3,550	1,900
3,500		1,910	935		1,935	945		1,990	975		2,035	995	1,065	1,400	2,900	3,615	2,160
4,000		1,960	960		1,985	970		2,040	1,000		2,090	1,025	1,100	1,450	3,000	3,745	2,230
4,500		2,010	985		2,035	995		2,090	1,025		2,140	1,050	1,135	1,500	3,100	3,755	2,520
5,000		2,110	1,035		2,135	1,045		2,190	1,075		2,245	1,105	1,210	1,600	3,300	3,725	2,730
5,500		2,110	1,035		2,135	1,045		2,190	1,075		2,245	1,105	1,210	1,600	3,300	3,975	2,890
6,000		2,260	1,110		2,285	1,120		2,340	1,150		2,395	1,180	1,315	1,750	3,600	3,805	3,310
6,500		2,310	1,135		2,335	1,145		2,395	1,180		2,445	1,205	1,350	1,800	3,700	3,835	3,430
7,000		2,510	1,235		2,335	1,145		2,395	1,280		2,645	1,305	1,500	2,000	4,100	3,545	4,000
7,500		2,510	1,235		2,335	1,145		2,395	1,280		2,645	1,305	1,500	2,000	4,100	3,695	4,150
8,000		2,510	1,235		2,335	1,145		2,395	1,280		2,645	1,305	1,500	2,000	4,100	3,895	4,360
8,500	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	4,045	4,510				
9,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	4,195	4,670				
10,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	4,545	5,040				
11,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	4,845	5,360				
12,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	5,195	5,720				
13,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	5,645	6,080				
14,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	5,995	6,440				
15,000	2,510	1,235	2,335	1,145	2,395	1,280	2,645	1,305	1,500	2,000	4,100	6,345	6,800				

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved


Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Nieder Korn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com





## Foam Storage Tanks | Foam Bladder Tank | VFT Twin Vertical Bladder Tank - PED Compliant

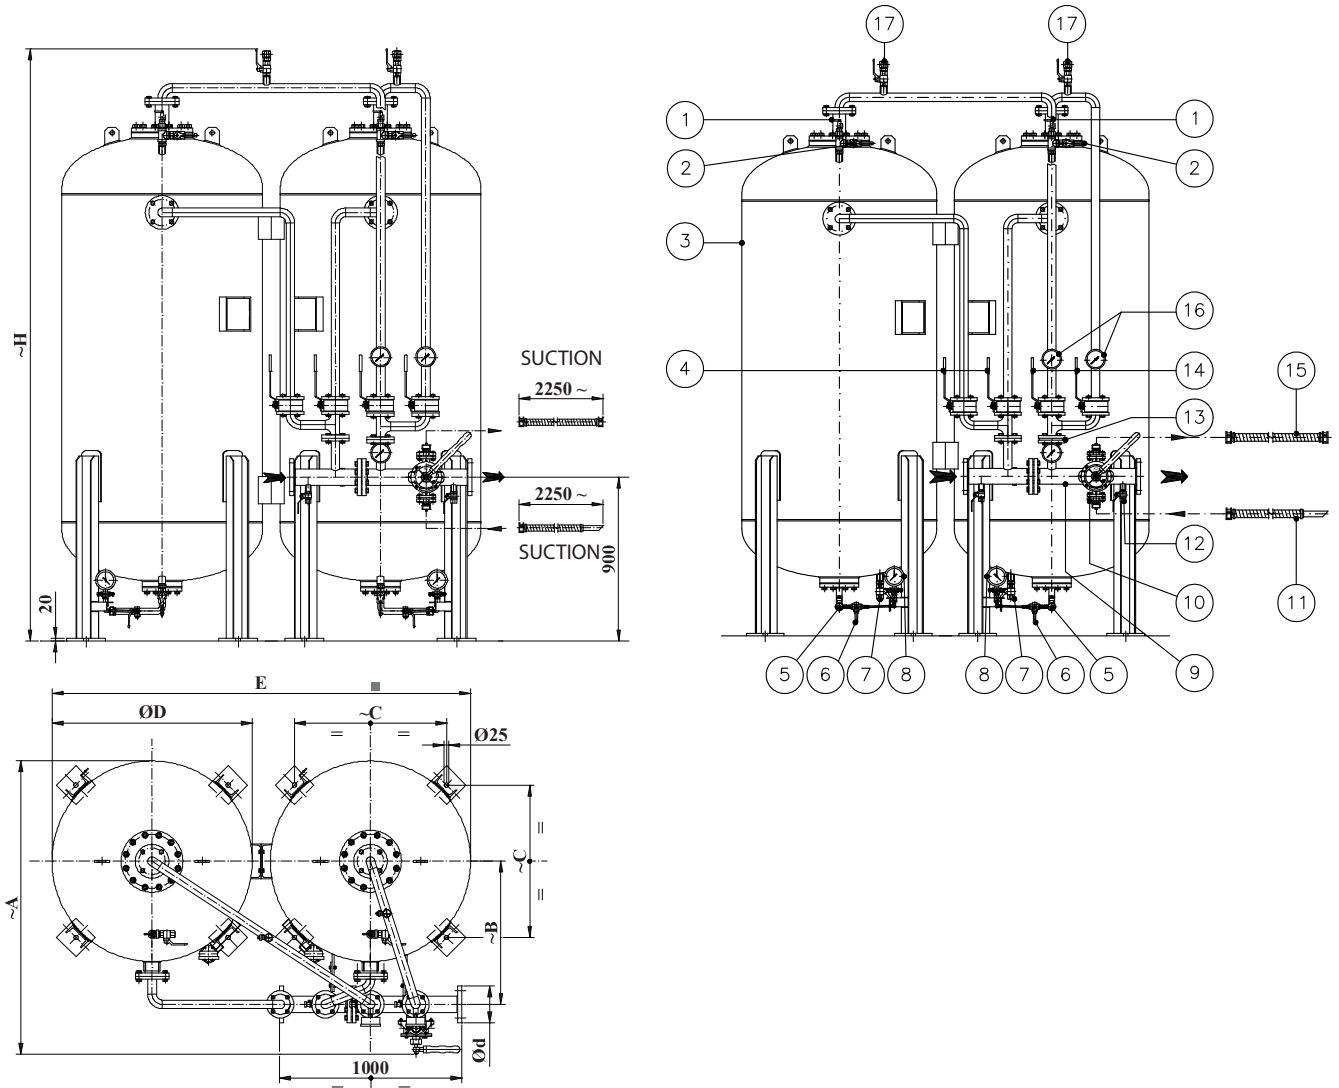

Item	Description	Item	Description
1	Safety valve	10	Fill pump
2	Water vent valve	11	Flexible hose
3	Tank	12	Mixer drain valves
4	Water cut-off valve	13	Check valve
5	Foam concentrate fill/drain valve	14	Concentrate cut-off valve
6	Foam level indicator valve	15	Flexible hose
7	Water drain valve	16	Tank pressure gauge
8	Foam level indicator	17	Concentrate vent valve / Overflow valve
9	Mixer		

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved

Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Niederborn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

