




Trailers & Towers | Monitor Trailers & Carts | MT Self Inducting Monitor Trailer



Concentrate drum is optional

SPECIFICATIONS	
Related Documents	None available
Approvals	
Materials	Carbon steel structure and hose boxes - Rubber tires
Finish	Red epoxy (Flame red RAL3000)
Weight	100 kg
Working pressure	16 bar* (Max.)
Max. Flow	3,000 l/min @ 7 bar
Monitor Horizontal Sweep	130° max
Monitor Elevation Angle	+85° - 0°
Maximum Speed	40 km/h
Options	<ul style="list-style-type: none"> • 200 l support drum (metallic petrol drum) • Concentrate drum • Fire hoses • 3-connection supply • Different feed connection type (STORZ, BS, etc.) • Trailer approved for public use**
<p>* Lower working pressures may need to be assessed based upon how the monitor is operated, supported and where installed. Please refer to recoil force table for further information. ** Standard trailer is not approved for public use. Customer to provide local requirements for public use so an assessment can be made if trailer can be adapted road legal in selected country.</p>	

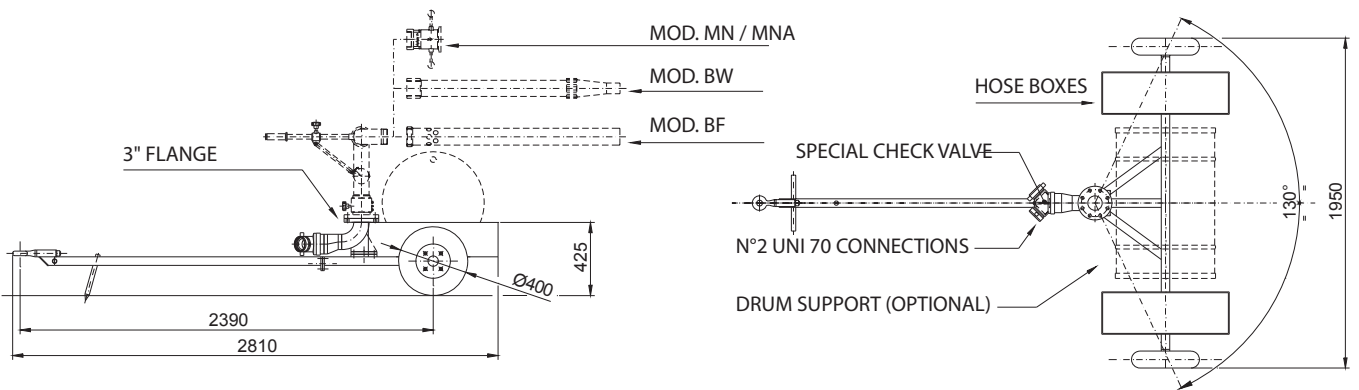

Part number	ØA (inch)	ØB (UNI70) (inch)	Tank volume (l)	Weight (kg)
EMT2R3	3"	2" x 2-1/2"	None	100
EMT2002R3	3"	2" x 2-1/2"	200 (drum support only)	110

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved

Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Niederborn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

