Monitor Equipment | Manual Monitor | MH Handwheel Operated Monitor



SPECIFICATIONS					
Related documents	None available				
Approvals					
Material (Body)	Stainless steel AISI 316				
Material (Joints)	Stainless steel AISI 316, Phosphor bronze balls				
Material (Flange)	Carbon steel or stainless steel				
Working pressure (Max.)	16 bar*				
Finish	Red epoxy (Flame red RAL3000)				
Connection type	Flange PN16				
Rotation	360° continuous				
Swivels	See table				
Options	 Polished stainless steel finish +85° elevation angle ANSI flanges 				
Weight	See table				

* Note:

Lower working pressures may need to be assessed based upon how the monitor is operated, supported and where installed. Please refer to recoil force table for further information.

Part number*	Vertical swivel	Horizontal swivel	ØD1 (inch) PN16	Flange material	ØD2 (inch) BSP	Max. flow rate (I/min)	Weight (kg)		
3" Stainless steel body (1 handwheel)									
EMH2-3X3CPS	Handwheel	Knob	3"	Carbon steel	3"	4,000	24.0		
EMH2-3X3SPS	Handwheel	Knob	3"	Stainless steel	3"	4,000	24.0		
EMH2-3X4CPS	Handwheel	Knob	4"	Carbon steel	3"	4,000	25.0		
EMH2-3X4SPS	Handwheel	Knob	4"	Stainless steel	3"	4,000	25.0		
4" Stainless steel body (1 handwheel)									
EMH2-4X4CPS	Handwheel	Knob	4"	Carbon steel	4"	8,000	26.0		
EMH2-4X4SPS	Handwheel	Knob	4"	Stainless steel	4"	8,000	26.0		
EMH2-4X6CPS	Handwheel	Knob	6"	Carbon steel	4"	8,000	27.0		
EMH2-4X6SPS	Handwheel	Knob	6"	Stainless steel	4"	8,000	27.0		
3" Stainless steel body (2 handwheels)									
EM2H2-3X3CPS	Handwheel	Handwheel	3"	Carbon steel	3"	4,000	34.0		
EM2H2-3X3SPS	Handwheel	Handwheel	3"	Stainless steel	3"	4,000	34.0		
EM2H2-3X4CPS	Handwheel	Handwheel	4"	Carbon steel	3"	4,000	35.0		
EM2H2-3X4SPS	Handwheel	Handwheel	4"	Stainless steel	3"	4,000	35.0		
4" Stainless steel body (2 handwheels)									
EM2H2-4X4CPS	Handwheel	Handwheel	4"	Carbon steel	4"	8,000	37.0		
EM2H2-4X4SPS	Handwheel	Handwheel	4"	Stainless steel	4"	8,000	37.0		
EM2H2-4X6CPS	Handwheel	Handwheel	6"	Carbon steel	4"	8,000	38.0		
EM2H2-4X6SPS	Handwheel	Handwheel	6"	Stainless steel	4"	8,000	38.0		
*For polished staipless steel finish - substitute final "S" of part number with an "X" (Example EM2H2-4X6SPX)									

*For polished stainless steel finish - substitute final "S" of part number with an "X" (Example EM2H2-4X6SPX)

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved




PS1.3.5.4/06092022/en | Rev.22.1 | Page 1/2

Trusted above all.

Viking S.A. (ed.) | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Monitor Equipment | Manual Monitor | MH Handwheel Operated Monitor

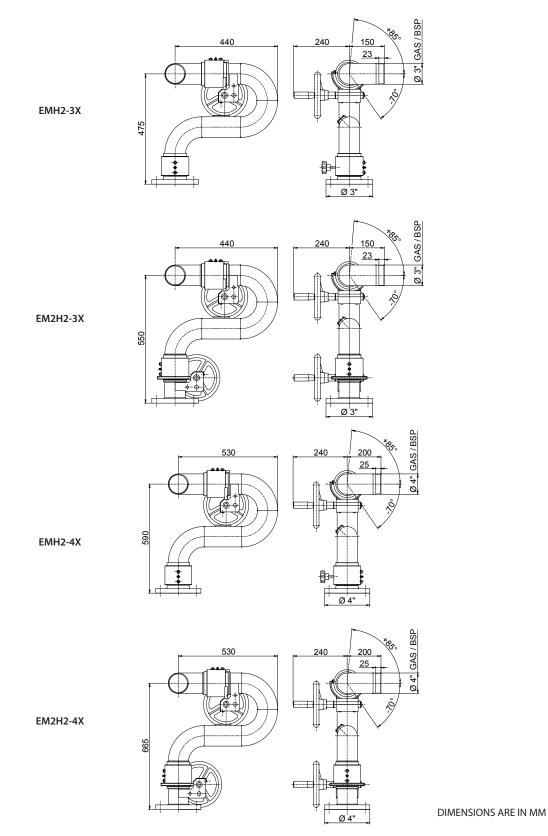

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved



P51.3.5.4/06092022/en | Rev.22.1 | Page 2/2

Trusted above all.